



# Capillary Channel Flow (CCF)





**ESA PI:** Prof. Michael Dreyer, ZARM  
**Co-I:** Prof. Mark Weislogel, Portland State University  
**PM:** Donna Bohman, NASA GRC  
**PS:** Dr. Allen Wilkinson, NASA GRC

Glenn Research Center

CCF in MSG

## Capillary Channel Test Unit

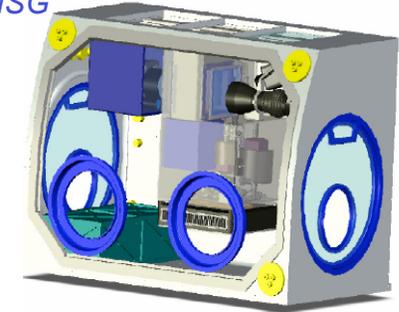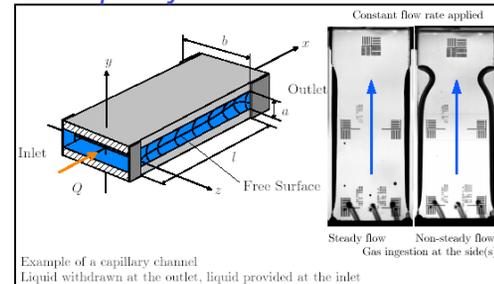

### Objective:

- ◆ To enable design of spacecraft tanks that can supply gas-free propellant to spacecraft thrusters, directly through capillary vanes, significantly reducing cost and weight, while improving reliability.

### Relevance/Impact:

- ◆ The current design of spacecraft fuel tanks rely on additional reservoirs to prevent the ingestion of gas into the engines during firing. This research is required to update these current models, which do not adequately predict the maximum flow rate achievable through the capillary vanes eliminating the need to over design tanks.

### Development Approach:

- ◆ Modularly designed system consisting of the Fluid Management System (FMS), the Board Computer (BC), and the Test Units (TU).
- ◆ The FMS is equipped with required components to establish the flow (pumps, plunger, valves), the TU contains the test channel, a phase separation chamber, (PSC), a compensation tube (CT), cameras for the video observation and required illumination.
- ◆ The test fluid that will be used is HFE7500, a 3M manufactured thermal engineering fluid, ethoxy perfluoroheptane. A toxicity assessment was performed by JSC, the rating assigned was tox level 0 for the projects application.
- ◆ The experiment control, sampling of the housekeeping data, communication with the MSG interfaces and the ground station (PI site) is performed by the BC. For the investigation of the selected channel geometries (parallel channel, groove channel, wedge-shaped channel, and a liquid bridge) and different channel dimensions, the TU is exchangeable. This enables the use of the set-up for other projects with similar technology driven research objectives.

### ISS Resource Requirements

<b>Accommodation (carrier)</b>	Microgravity Science Glovebox
<b>Upmass (kg)</b> (w/o packing factor)	35-50
<b>Volume (m<sup>3</sup>)</b> (w/o packing factor)	0.133
<b>Power (kw)</b> (peak)	.174
<b>Crew Time (hrs)</b> (installation/operations)	24
<b>Autonomous Ops (hrs)</b>	TBD
<b>Launch/Increment</b>	STS-130, Increment 20

### Project Life Cycle Schedule

Milestones	SCR	PDR	DeltaPDR	CDR	Phase 0/1 Safety	Phase II Safety	FHA	Launch	Ops	Return	Final Report
<b>Actual/ Baseline</b>		05/2005	03/2007	02/2008	06/2007	05/2008	2009	19A/11/2009	Incr. 19	2009	2010
<b>Documentation</b>	Website: <a href="http://exploration.grc.nasa.gov/Advanced/ISSResearch/MSG/CCF/">http://exploration.grc.nasa.gov/Advanced/ISSResearch/MSG/CCF/</a> eRoom: To be developed				SRD: Baselined 06/2007 (see website) EDMP: To be developed			Project Plan: To be developed SEMP: To be developed			

Revision Date: 9/22/2008